


INDUSTRY HOSE STATION

SW-75-1572-LF-HDHR-50HDH-N2

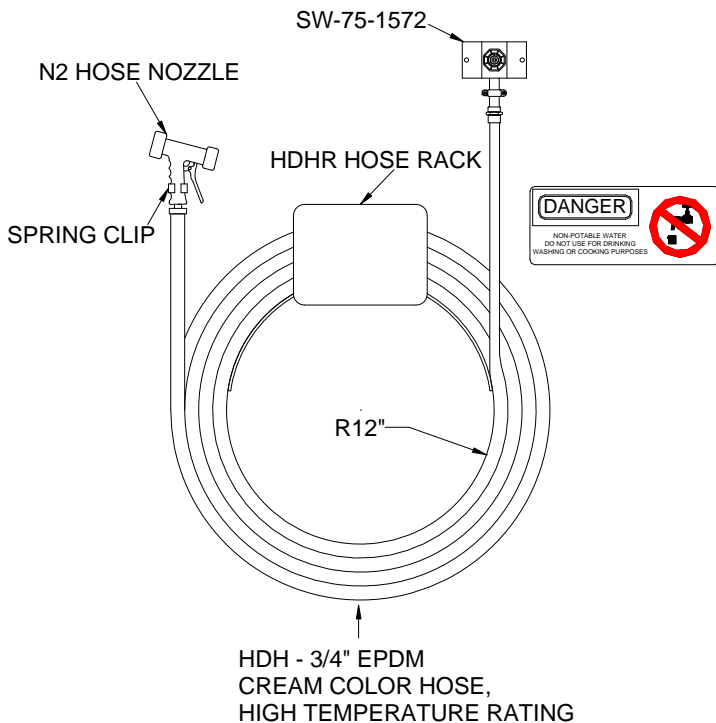

SW-75-1572-LF

- Volume control/shutoff with heat resistant handle (RED).
- 3/4" IPS water inlet, 3/4" IPS water outlet.
- Special bracket for wall mounting.
- Hose connection.
- Rough finish.
- Maximum operating pressure: 125 PSI (8.5 Bar)

ACCESSORIES

- N2- Standard Hose Nozzle
- SC- Spring Clip.
- HDHR- Heavy Duty Hose Rack, welded construction, 1/4" saddle, 1/8" stainless steel face and backplate.
- 50 HDH- Heavy Duty Hose, fifty feet, 3/4" EDPM cream color cover, high temperature resistant.
- 80 PSI (5.5 bar) maximum operating steam pressure.
- 125 PSI (8.5 bar) maximum operating water pressure.
- OSHA approved safety sign.

OPTIONAL ACCESSORIES

- ___ N2-SS- Body and internal parts of stainless steel.
- ___ 75 HDH- Seventy five feet of heavy duty hose.
- ___ 100 HDH- One hundred feet of heavy duty hose
- ___ SP- Stainless Steel Spring protector, furnished on one end of hose.
- ___ SW- Bronze Swivel attachment on hose.
- ___ DT-Dial Thermometer on outlet
- ___ CP- Chrome plated finish

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.

Valve Assembly is Third Party certified to meet national Low Lead requirements of AB 1953 where wetted surface area is required to be less than 0.25% lead by weight.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

Job # _____	Engineer's Approval
Arch/Eng. _____	
Contractor _____	



1360 Elmwood Avenue, Cranston, RI 02910 USA
Phone: 401.461.1200 Fax: 401.941.5310
Email: info@leonardvalve.com
Web Site: <http://www.leonardvalve.com>