

PRESSURE ACTUATED SHOWER

PAM®II-ST-F

1/2" inlets and outlet



SHOWER OR TUB/SHOWER



__PAM®II-ST-F Pressure Actuated mixer

- Durable stainless steel balancing piston to equalize hot and cold supply pressures.
- Built-in shutoff for single handle operation
- Removable one piece upper and lower valve seat
- Internal parts of bronze and stainless steel
- Cast wall flange and lever handle, polished chrome plated
- Maximum operating pressure: 125 PSIG (860KPA)
- Adjustable high temperature limit stop set for 110°F* (43°C)
- Color coded dial, Off through Hot, with directional indicators
- Minimum flow 1.5 GPM (5.7 l/min)
- Plaster-guard/thin wall mounting bracket included
- Angle Checkstops, copper tube connection

Valve is ASSE 1016 – Type P Certified
Valve is CSA B.125-16 – Type P Certified




OPTIONS:

__Suffix VP – Vandal resistant screws





WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

PAM
FLOW CAPACITIES

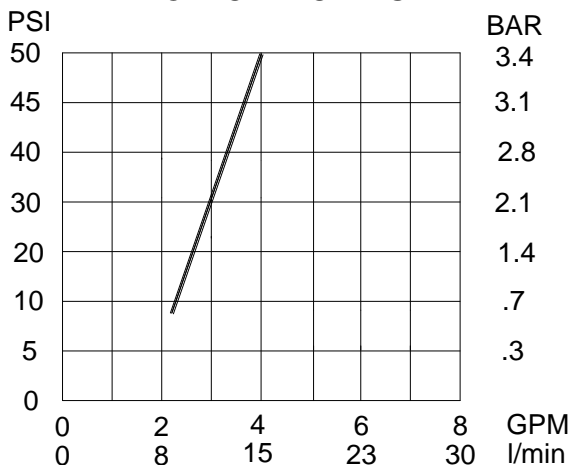

PAM-II-ST-F

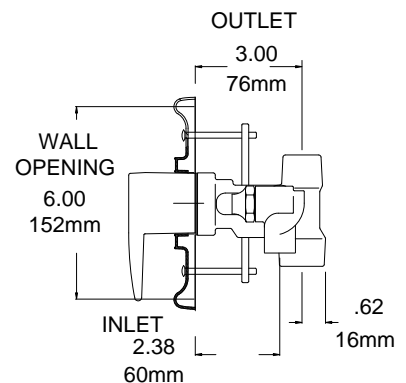

Job # _____	Engineer's Approval
Arch/Eng. _____	
Contractor _____	

***NOTE:** A limit stop, set for 110°F (43°C), is simply a mechanical setting to prevent excessive handle rotation. If incoming water is hotter than 135°F (57°C), the temperature of the factory test, the valve when turned to full HOT may deliver water in excess of 110°F and the limit stop MUST BE RESET BY THE INSTALLER



1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com

Web Site: <http://www.leonardvalve.com>