


WASHDOWN HOSE STATION ASSEMBLY SS-HA-2

Dual Temperature , Stainless Steel, Manual Blender to mix steam & cold water or hot & cold water

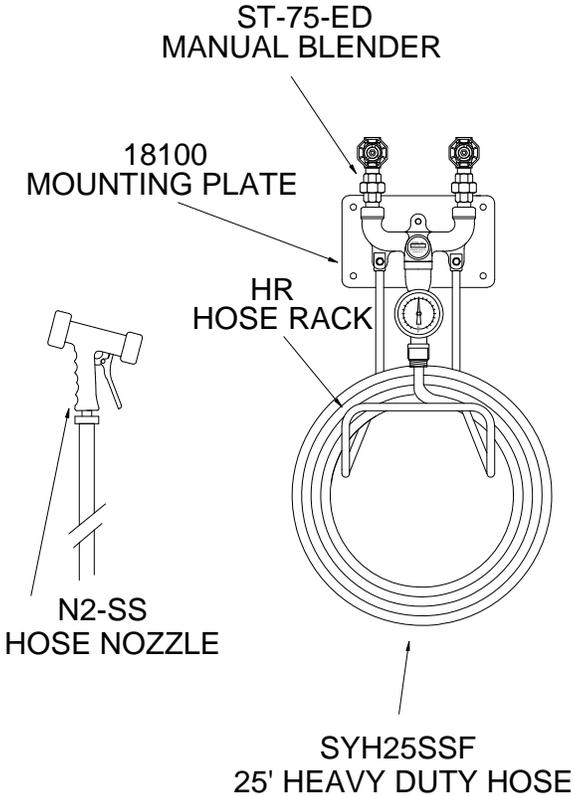

- Manual Blender - Type 316 Stainless Steel Construction
- 3/4" NPT Inlets with Stop & Check Valves - Color Coded, Heat Resistant Handles
- 3/4" GHT Outlet - Hose Connection with Dial Thermometer (20 to 240°F, -5 to 115°C)
- Stainless Steel Mounting Plate and Hose Rack
- 3/4" Heavy duty Hose with Stainless Steel Fittings - 25' Safety Yellow Hose with Anti-Microbial Exterior Coating
- 40 PSI (2.8 bar) minimum operating pressure
- Maximum Operating Pressure: 125 PSI Hot Water - Cold Water, 80 PSI Steam - Cold Water
- Stainless Steel Hose Nozzle with Heat Resistant Cover

Options:

___ -50 50 foot hose in place of standard 25 foot






This Product is Third Party certified to meet national Low Lead requirements of AB 1953 where wetted surface area is required to be less than 0.25% lead by weight.

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____



1360 Elmwood Avenue, Cranston, RI 02910 USA
Phone: 401.461.1200 Fax: 401.941.5310
Email: info@leonardvalve.com
Web Site: <http://www.leonardvalve.com>

SS-HA-2

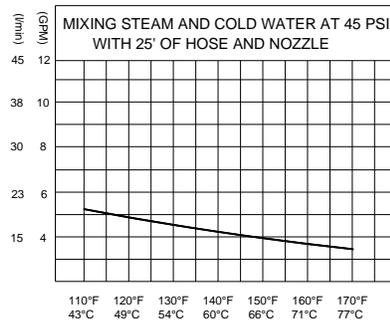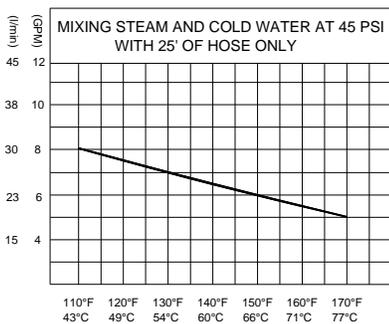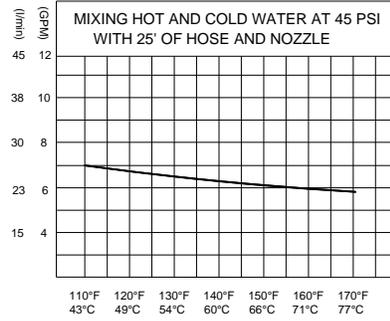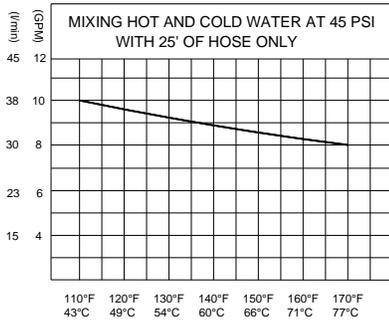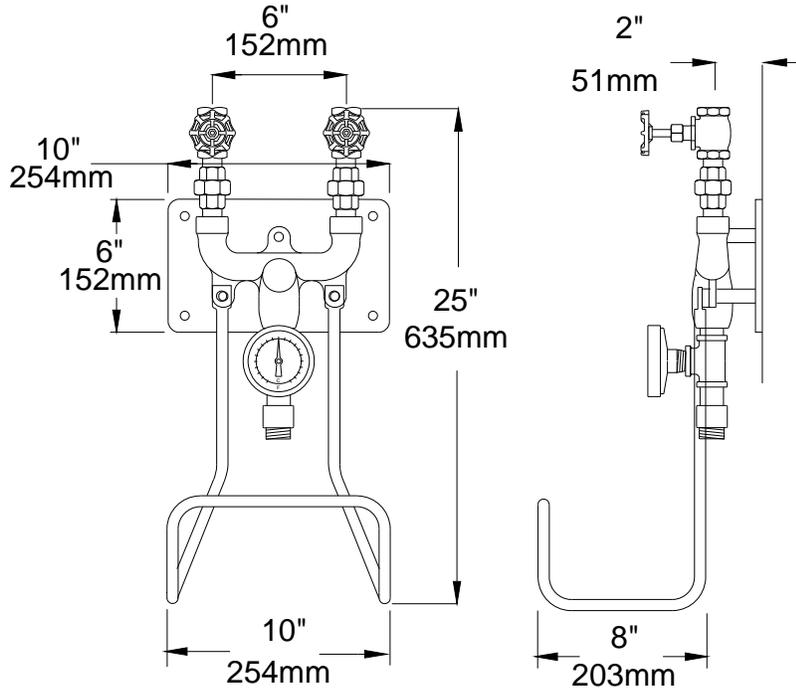

1360 Elmwood Avenue, Cranston, RI 02910 USA
 Phone: 401.461.1200 Fax: 401.941.5310
 Email: info@leonardvalve.com