


INDUSTRIAL HOSE STATION ACCESSORIES



25-HDS (shown)

Hoses are designed to convey hot water in washdown and cleanup applications in food-processing plants, dairies, breweries, canneries, creameries, and similar industrial locations

More accessories shown on pages 2 and 3

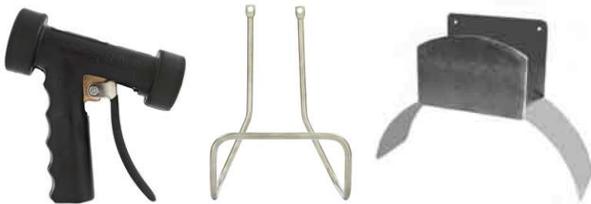

NOTE: All accessories not designed for use with live steam

NOTE: Leonard Valve Company reserves the right of product or design modification without notice or obligation



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

25-HDH Heavy Duty Hose

- 3/4" ID EPDM cream colored textile reinforced hose
- Temperature range, -40-210°F (-40-99°C)
- Working pressure, 300 PSI (at 70 deg F)
- 3/4" Garden hose connection (supply end) x 1/2" NPT Male (standard nozzle end)
- Brass fittings

- ___ 5 HDH, five feet (1.5 meters)
- ___ 10 HDH, five feet (3 meters)
- ___ 15 HDH, five feet (4.5 meters)
- ___ 20 HDH, five feet (6 meters)
- ___ 50 HDH, five feet (15 meters)
- ___ 75 HDH, five feet (23 meters)
- ___ 100 HDH, five feet (30 meters)

Note: Special lengths available upon request

OPTIONS: (must be purchased with hose)

- ___ SUFFIX SP - Stainless spring protector, one end
- ___ SUFFIX SW - Swivel connection on nozzle end
- ___ SUFFIX QD - Quick disconnect (brass)

25-HDS Heavy Duty Hose

- Same specifications as above except for below,
- Stainless steel fittings
- Stainless steel spring protector, one end (supply)

- ___ 5 HDS, five feet (1.5 meters)
- ___ 10 HDS, five feet (3 meters)
- ___ 15 HDS, five feet (4.5 meters)
- ___ 20 HDS, five feet (6 meters)
- ___ 50 HDS, five feet (15 meters)
- ___ 75 HDS, five feet (23 meters)
- ___ 100 HDS, five feet (30 meters)

Note: Special lengths available upon request

OPTIONS: (must be purchased with hose)

- ___ SUFFIX SW - Swivel connection on nozzle end
- ___ SUFFIX QD - Quick disconnect (stainless steel)

SAFETY HOSES, NOZZLES

25-SYH25SSF

Safety yellow anti-microbial exterior coating heavy duty hose

- Same specifications as HDS hose except for below,
- Safety yellow anti-microbial exterior coating

___ 50 SYH50SSF, five feet (15 meters)

Note: Special lengths available upon request

OPTIONS: (must be purchased with hose)

___ SUFFIX SW - Swivel connection on nozzle end

___ SUFFIX QD - Quick disconnect (stainless steel)

N-2 Bronze Nozzle

Bronze with black rubber cover, 1/2" female NPT inlet

Adjustable spray pattern depending on trigger pull, self closing automatic shutoff

Maximum temperature: 200°F (96°C), maximum pressure: 150 PSI

N-2-SS Stainless Steel Nozzle

Stainless steel with black rubber cover, 1/2" female NPT inlet

Adjustable spray pattern depending on trigger pull, self closing automatic shutoff

Maximum temperature: 200°F (96°C), maximum pressure: 150 PSI

N-2A Stainless Steel Nozzle

Stainless steel with blue nylon cover, 1/2" female NPT inlet

Adjustable spray pattern depending on trigger pull, self closing automatic shutoff

Trigger locking feature to keep nozzle open at any spray pattern

Maximum temperature: 200°F (96°C), maximum pressure: 150 PSI

N-3 Straight Nozzle

Straight nozzle with brass open end, chrome plated

N-2BR Optional nozzle mounting clip, N-2, N-2-SS

N-2



N-2-SS



N-2A



N-3



NOTE: Leonard Valve Company reserves the right of product or design modification without notice or obligation

 **LEONARD**[®]
WATER TEMPERATURE CONTROLS



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com

Web Site: <http://www.leonardvalve.com>

HOSE RACKS


HR

Standard hose rack, stainless steel
Includes integral mounting brackets
Fits up to 35 feet of hose length
(can fit 50 feet with larger hose "loops")





HDHR


Heavy duty hose rack, stainless steel
Welded construction

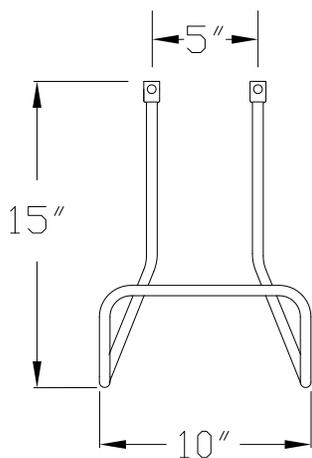

HR

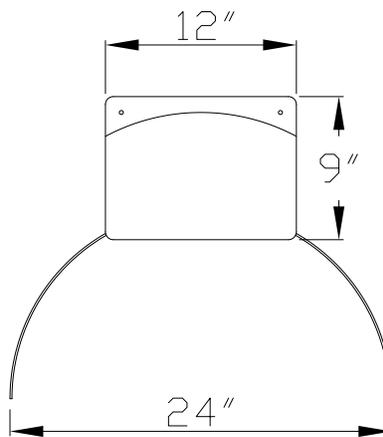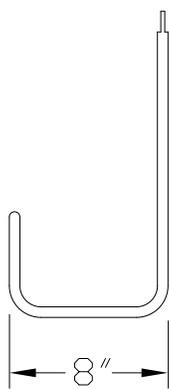

HDHR

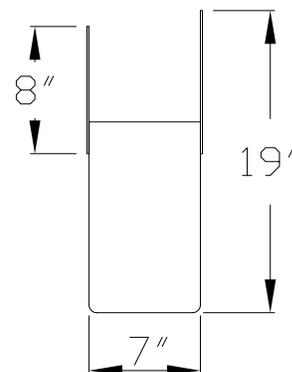

NOTE: Leonard Valve Company reserves the right of product or design modification without notice or obligation



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov



1360 Elmwood Avenue, Cranston, RI 02910 USA
Phone: 401.461.1200 Fax: 401.941.5310
Email: info@leonardvalve.com
Web Site: <http://www.leonardvalve.com>