


MEGATRON Double Proton Plus Digital Mixing Valve

1. Double Proton Plus Digital Mixing Valve MEGATRON
2. Double Proton Plus Digital Mixing Valve MEGATRON models shall:
 1. Have inlet and outlet NPT female connections
 2. Be constructed of 100% stainless steel
 3. 2-line, 16-character LED display
 4. Integral RTD Sensor
 5. Maintain temperature with 0.0 GPM flow from the domestic hot water loop
 6. Have maximum Operating Pressure no greater than 200 PSI
 7. Be certified to ASSE standard 1017 and CSA B125.3-18 and so certified and identified
 8. Be cULus listed and identified
 9. Be NSF 61 Compliant
3. Double Proton Plus Digital Mixing Valve MEGATRON shall have all the following operational capabilities:
 1. Daily shuttle sweep designed to prevent scale buildup on internal mechanical components
 2. +/- 2°F water temperature control at times of use and no demand
 3. Self-balancing and does not need to have recirculation balanced or adjusted
 4. Automatic shutoff of hot water upon cold water inlet supply failure
 5. Automatic shutoff of cold water upon hot water inlet supply failure
 6. Maintain last control position in the event of power failure or be equipped with UPS standby power for approximately 2 hour run time
 7. Programmable set point range of 95-180°F (18-82°C)
 8. Simple/intuitive user commissioning and setup
 9. ETL Listed control box and 120v plug in power supply with 6' cord
- a. Control Box shall have the following options:
 1. Disinfection Option standard
 2. BMS connectivity utilizing BACnet MS/TP connection or Modbus RTU standard
 3. Wi-Fi enabled standard
 4. 3T (3 additional temperature probes for hot and cold inlet in addition to return) standard
 5. Optional REL (Connectivity for 5 relay states)
 6. Optional Back up Powers Supply for uninterruptable power supply for up to two hours run time in the event of primary power loss

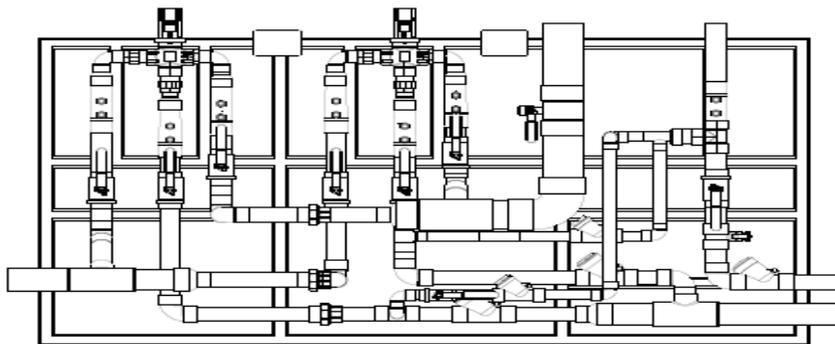

		Pressure Drop (PSI)									
Model #	Minimum Flow*	5 PSI	10 PSI	15 PSI	20 PSI	25 PSI	30 PSI	35 PSI	40 PSI	45 PSI	50 PSI
M-PPV150-2PS	20 GPM	146	200	240	268	294	318	336	354	370	384
M-PPV200-2PS	24 GPM	212	296	364	410	460	488	512	532	548	560
Flow in Gallons per Minute (GPM)											
Valves should be sized based on a 5 to 10 PSI drop											
Valve Size will most likely be less than inlet/outlet pipe sizes											