

INDUSTRY HOSE STATIONS



SW-75-EVBD-LF

SW-75-EVB-LF

SW-75-E-LF

MANUAL STEAM & WATER BLENDERS

Mix hot & cold water OR steam & water

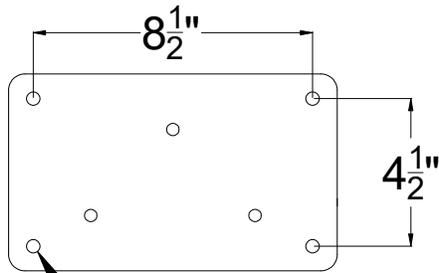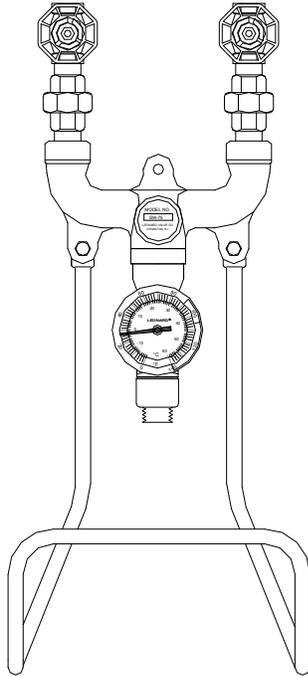

4 HOLES .406 DIA.

18100 Optional mounting plate

SW-75-EVBD-LF

- Manual Steam & Water Blender
- 3/4" NPT Female inlets
- 3/4" GHT Garden Hose connection on outlet
- Two stop and check valves with color coded heat resistant handles on inlets, (internal parts of stainless steel construction)
- Mixing chamber with steam jet, (stainless steel)
- 3/4" outlet with dial thermometer (20 to 240°F, -5 to 115°C)
- Vacuum breaker
- Available in Rough (RF) or Chrome plated (CP) finish
- Stainless steel hose rack
- 40 PSI (2.8 bar) minimum operating pressure
- 80 PSI (5.5 bar) maximum operating steam pressure
- 125 PSI (8.6 bar) maximum operating water pressure

SW-75-EVB-LF - Less dial thermometer

SW-75-ED-LF - Less vacuum breaker

SW-75-E-LF - Less dial thermometer & vacuum breaker

OPTIONS:

SUFFIX RF - Rough bronze finish

SUFFIX CP - Chrome Plated finish

18100 - Stainless steel mounting plate



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.Ca.gov

This Product is Third Party certified to meet national Low Lead requirements of AB 1953 where wetted surface area is required to be less than 0.25% lead by weight.

Engineer's Approval	Job # _____
	Arch/Eng. _____
	Contractor _____



1360 Elmwood Avenue, Cranston, RI 02910 USA


Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com






Web Site: <http://www.leonardvalve.com>

MANUAL STEAM & WATER BLENDERS

SW-75-EVBD-LF

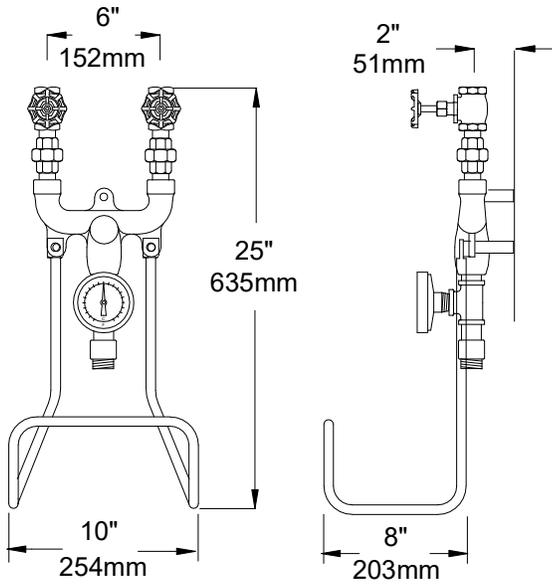

SW-75-EVB-LF

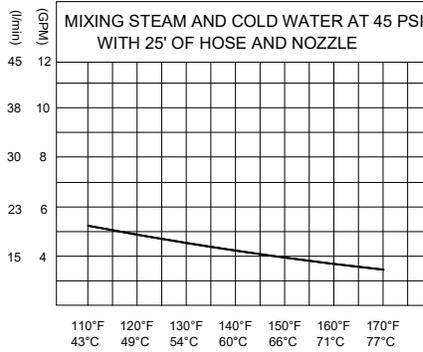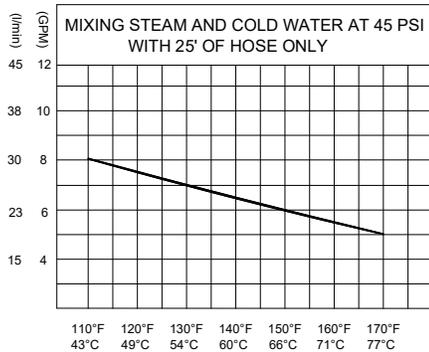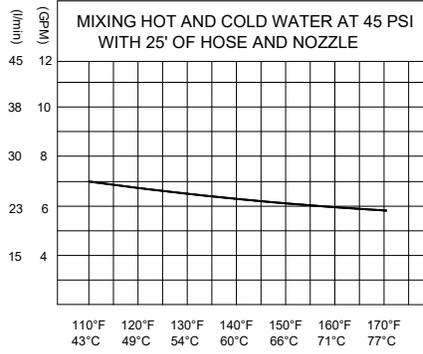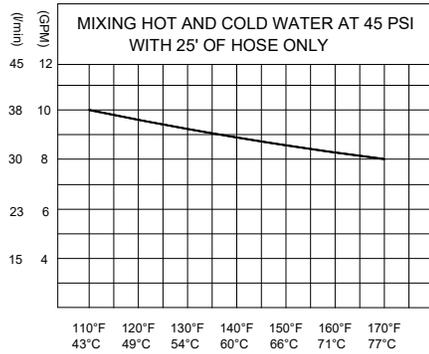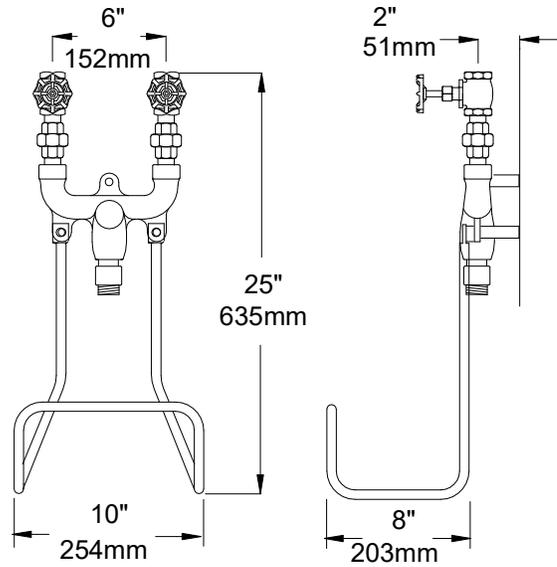

IMPORTANT! The prevailing steam (or hot water) pressure must be slightly lower than the cold water pressure.

Not for use with unequal pressures. Install pressure reducing valves where unequal pressure conditions exist.

CAUTION: These valves may pass live steam under certain circumstances. Follow recommended operating instructions and wear protective clothing when using.

NOTE: Hose and nozzle not included. If required, please attach separate submittal sheet.



1360 Elmwood Avenue, Cranston, RI 02910 USA

Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com